




DC STAND FAN

HM35S

Smarter Cooling, Cleaner Air, and Energy Savings.


- 36cm (14")
- Direct Current Motor
- 8-speed with remote
- Built-in ECO Temperature Sensor
- Negative Ion Technology
- 7 Blades Design
- Strengthened Steel Pole

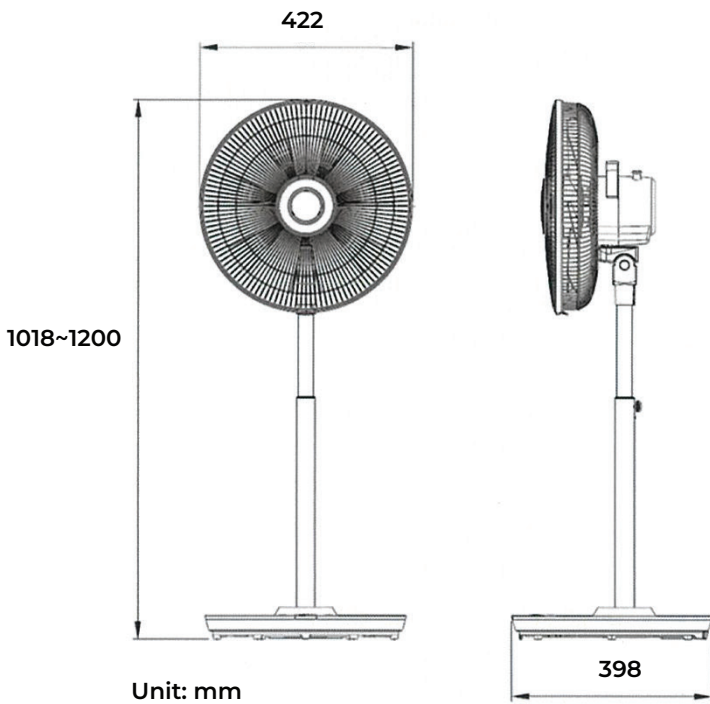

TECHNICAL SPECIFICATIONS


MODEL	POWER CONSUMPTION	VOLTAGE
HM35S	16W	220V~240V, 50Hz
MAXIMUM WATTAGE	MAXIMUM R.P.M	WEIGHT
16	760	5.9kg
AIR VELOCITY [m/min]	AIR DELIVERY [m ³ /min]	
140	44	

8 SAFETY MEASURES




DOUBLE INSULATED CABLE

Prevent short circuit and catch fire.




ENCLOSED MOTOR

Prevents fire from spreading.



CUT-OFF SAFETY SWITCH

Automatically cuts off power supply if the current is too high.




FIRE RESISTANT MATERIAL FOR PCB OUTER CASE

Prevents fire from spreading.



THERMAL SAFETY FUSE ON POWER SUPPLY

Prevents current surges from damaging internal components.




THERMAL SAFETY FUSE ON PCB

Prevents current surges from damaging internal components.



TRIPLE INSULATION DESIGN

Prevents short circuits caused by wire wear and weathering.



PROTECTION DESIGN IN THE EVENT OF MOTOR LOCKING

Automatically cuts off power supply to prevent overheating in case of unexpected motor lock.




DC STAND FAN

HN35S

Smarter Cooling, Cleaner Air, and Energy Savings.


- 36cm (14")
- Direct Current Motor
- 7-speed with remote
- Built-in ECO Temperature Sensor
- 7 Blades Design
- Strengthened Steel Pole

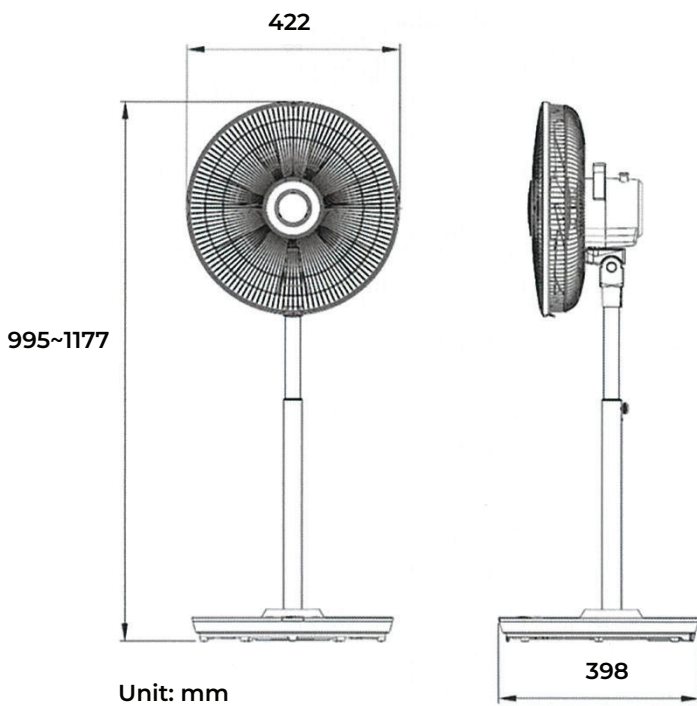

TECHNICAL SPECIFICATIONS


MODEL	POWER CONSUMPTION	VOLTAGE
HN35S	17W	220V~240V, 50Hz
MAXIMUM WATTAGE	MAXIMUM R.P.M	WEIGHT
17	800	4.5kg
AIR VELOCITY [m/min]	AIR DELIVERY [m ³ /min]	
150	52	

8 SAFETY MEASURES




DOUBLE INSULATED CABLE

Prevent short circuit and catch fire.




ENCLOSED MOTOR

Prevents fire from spreading.



CUT-OFF SAFETY SWITCH

Automatically cuts off power supply if the current is too high.




FIRE RESISTANT MATERIAL FOR PCB OUTER CASE

Prevents fire from spreading.



THERMAL SAFETY FUSE ON POWER SUPPLY

Prevents current surges from damaging internal components.



THERMAL SAFETY FUSE ON PCB

Prevents current surges from damaging internal components.



TRIPLE INSULATION DESIGN

Prevents short circuits caused by wire wear and weathering.



PROTECTION DESIGN IN THE EVENT OF MOTOR LOCKING

Automatically cuts off power supply to prevent overheating in case of unexpected motor lock.